



KEY FEATURES

- Extreme Duty - for harsh environments & remote locations
- Double guide bars
- Optimized roll in/roll out properties
- High pressure cylinder with double piston rod seals
- High tensile wear resistant steel (400 HB)
- Extra reinforced body for rigid mounting - Excavator design

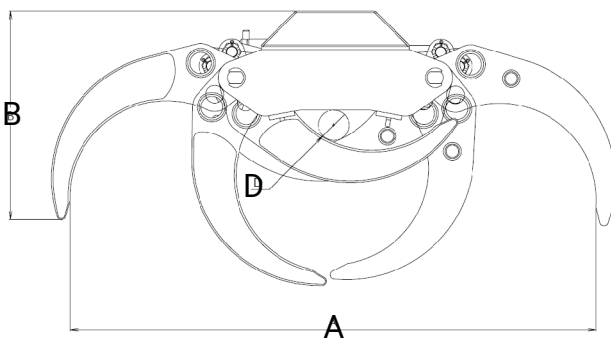

	TG 42 SM	TG 55 SM	TG 80 SM	TG 100 SM
A	1831	2445	2780	2948
B	1265	1025	1176	1432
C	960	802	900	985
D	100	150	170	170
E	540	633	632	702

MODEL SPECIFICATIONS	Kg	m ²	Bar	l/min	GRIPPING FORCE kN	CAPACITY ton	FORESTRY tm	PENDULUM ton	RIGID ton	MATERIALS HANDLER MH ton
TG 42 SM	500	0.50	300	70	21.8	10	-	35	25	35
TG 55 SM	910	0.65	300	90	25	10	45	30	25	35
TG 80 SM	980	0.80	300	90	26	10	30	30	-	30
TG 100 SM	1357	1	300	90	38	12	-	40	-	45