


INTERMERCATO | Five Finger Grab TG12 - 55SR5



We accept no substitute

KEY FEATURES

- Mount horizontal for poles or inline
- Heavy duty
- Double guide bars
- Optimized roll in/roll out for logs & bunching
- High pressure cylinder with double piston rod seals
- HARDOX High tensile wear resistant steel (400 HB)
- Extra reinforced body for rigid mounting - Excavator design
- Optional rotator

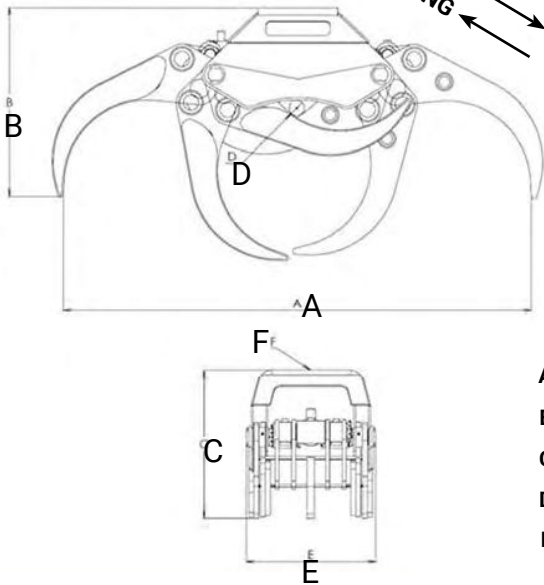

	TG 12 SR5	TG 16 SR5	TG 16 PRO SR5	TG 16 PRO SR7	TG 22 PRO SR5	TG 25 PRO SR5	TG 28 SR5	TG 35 SR5	TG 42 SR5	TG 55 SR5
A	810	950	930	950	1225	1370	1500	1890	1895	2425
B	550	550	515	482	585	675	735	763	925	960
C	350	400	355	355	440	495	565	594	675	800
D	38	60	47	50	60	72	95	65	100	150
E	273	301	344	344	432	478	512	522	530	635

MODEL SPECIFICATIONS	WEIGHT Kg	GRIP AREA m ²	PRESSURE Bar	FLOW l/min	CLAMPING kN	FORESTRY tm	CAPACITY ton	PENDULUM ((C)) ton	RIGID ton	FORWARDER
TG 12 SR5	60	0.12	200	15-30+	8	2.5	0.8	2.5	1.5-2	-
TG 16 SR5	75	0.16	200	20-40	9	3	1	3	2-3.5	-
TG 16 PRO SR5	85	0.16	200	20-50	7	3	1	4	3-4.5	-
TG 16 PRO SR7	85	0.16	200	20-50	7	3	1	4	3-4.5	-
TG 22 PRO SR5	160	0.20	200	30-50	12	5	3	8	3-5.5	-
TG 25 PRO SR5	235	0.22	250	50	14	9	4	12	5-10	-
TG 28 SR5	300	0.30	250	60	15	15	5	15	8-12	OK
TG 35 SR5	400	0.38	250	60	18	15	7	15	10-12	OK
TG 42 SR5	480	0.50	250	70	25	25	8	20	12-16	OK
TG 55 SR5	860	0.65	250	90	25	30	10	30	16-21	X

INTERMERCATO

High performance lift and load attachments for Forestry, Transport, Construction and Recycling.

