




We accept no substitute


KEY FEATURES

- Heavy duty
- Special alu-bronze-graphite bushing
- HARDOX High tensile wear resistant steel (400 HB)
- Choose your rotator – Worm Drive for accuracy or RMR for speed
- Extra reinforced body for rigid mounting - Excavator design
- Harvesting shear also available

	TC 210R	TC 250R	TC 300R
A	1140	1096	1413
B	780	899	1308
C	572	635	853
D	75	95	85
E	375	434	584
F	210	250	300

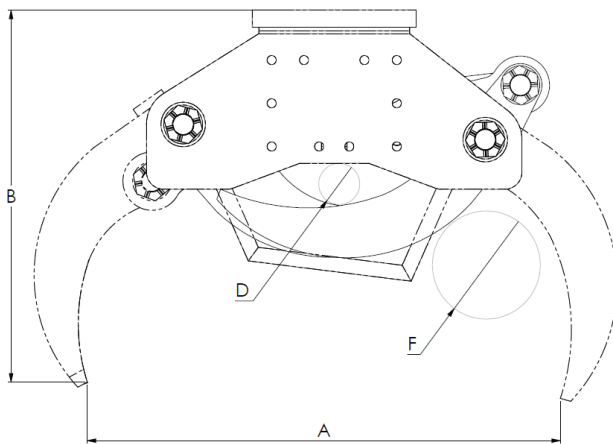

DOUBLE JAW MAIN CUTTING SIDE



MODEL SPECIFICATIONS	WEIGHT	PRESSURE	FLOW	CUTTING	RIGID	Piston diam.	Cylinder diam.	Blade mm.
	Kg	Bar	l/min	kN	ton			
TC210R	210	250	50	53	3 - 8	63	110	12
TC250R	340	250	70	74	8 - 15	70	125	15
TC300R	770	300	70 - 100	120	12 - 30	90	140	20